

ARKFO

ANTISTATEX® RANGE



ARKFO is our premium product for intermediate and finishing sanding.

The product combines the capacity for high rates of material removal with the ability to present an excellent surface finish. The excellent cutting action of the aluminium oxide grit enables minimal fibre rising and a more even surface.

The Antistatex® bonding system provides a full antistatic effect which together with an open coat grit distribution reduces clogging to a minimum and contributes to the best possible sanded surface finish.

TECHNICAL SPECIFICATION

- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic
- Grit:** Aluminium Oxide
- Coating:** Open
- Grit range:** P 120—P 180 (A-Range*)
P 60—P 100, P 220—P 240 (B-Range*)
- Width:** 1370 mm standard, 1420 mm per request

APPLICATIONS

Intermediate and finishing sanding of solid wood and veneer.


Wood: Soft Wood and Hard Wood

Board: Particle board and MDF

Lacquer:

Specials: Rubber

RECOMMENDED FORMS

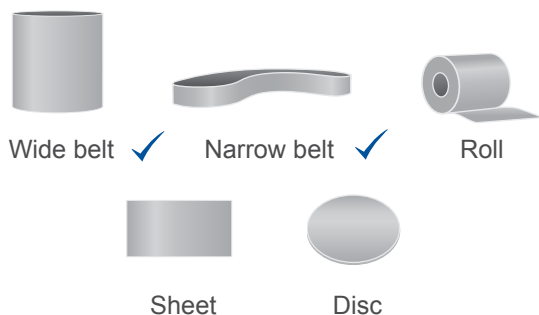

EKAMANT
SWEDISH QUALITY COATED ABRASIVES