

# ARSFO

ANTISTATEX® RANGE



ARSFO has a coating of silicon carbide which contributes to the best possible sanding finish with fine scratch pattern.

The Antistatex® bonding system provides a full antistatic effect which together with open coat grit distribution reduces clogging of the product and minimizes dust load on the sanded surface.

## TECHNICAL SPECIFICATION


- Backing:** F-weight paper
- Bonding:** Resin over resin
- Treatment:** Fully Antistatic
- Grit:** Silicon Carbide
- Coating:** Open
- Grit range:** P 180—P 240 (A-Range\*)
- Width:** 1370 mm standard, 1420 mm per request

## APPLICATIONS

Excellent for finishing sanding. Gives the best possible surface in cross-grained sanding.

- Wood:** Soft Wood and Medium hard Wood
- Board:** MDF, HDF and Particle board
- Lacquer:** Hard UV-lacquer
- Specials:**

## RECOMMENDED FORMS

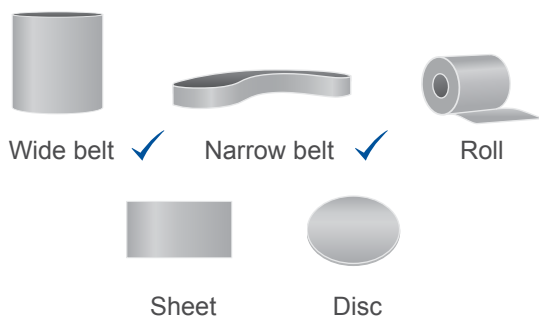

**EKAMANT**  
SWEDISH QUALITY COATED ABRASIVES